


Project: Grundfos Solar Combo 4 (100m 10 000L per day)
Reference Number:

Client:
Client Number:
Contact:

Position	Qty.	Description
	1	<p>SQF 1.2-3</p>  <p style="text-align: right;">Note! Product picture may differ from actual product</p> <p>Product No.: 96834838 The 3" SQFlex pump with helical rotor is for high heads and low flow rates.</p> <p>The SQFlex system is a reliable water supply system based on renewable energy sources, such as solar and wind energy. Thanks to its flexible energy supply and performance, the SQFlex system can be combined and adapted to meet any need on the installation site.</p> <p>The SQFlex system has a wide voltage range, built-in maximum power point tracking (MPPT) as well as dry-running, voltage and overload protection.</p> <p>Liquid: Pumped liquid: Water Maximum liquid temperature: 40 °C Liquid temperature during operation: 20 °C Density: 998.2 kg/m³ Kinematic viscosity: 1 mm²/s</p> <p>Technical: Approvals on motor nameplate: CE,RCM,EAC</p> <p>Materials: Pump: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Installation: Maximum ambient pressure: 15 bar Pump outlet: Rp 1 1/4 Minimum borehole diameter: 76 mm</p> <p>Electrical data: Motor type: MSF3 Power input - P1: 1.4 kW Rated voltage ac: 1 x 90-240 V Rated voltage dc: 30-300 V Rated current: 8.4 A Power factor: 1.0</p>



Company name: Tripple Hydro & Energy
Created by: werdus voges , Hannes Moolman
Phone: 087 630 1083
Email: info@tripplegroup.co.za
Date:

Project: Grundfos Solar Combo 4 (100m 10 000L per day)
Reference Number:

Client:
Client Number:
Contact:

Position	Qty.	Description
		Rated speed: 500-3600 rpm Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 2 m Udc: 300 V 30 V Others: Minimum efficiency index, MEI : -.- Net weight: 9.81 kg Gross weight: 10.9 kg Shipping volume: 0.024 m ³

Project: Grundfos Solar Combo 4 (100m 10 000L per day)
Reference Number:

Client:
Client Number:
Contact:

96834838 SQF 1.2-3

Input - summary

Water volume (max): 10 m³/day
 Peak month: January
 Static lift above ground: 100 m
 Dynamic water level: 0 m
 Sun tracking: No (fixed)
 Location: George, Western Cape, South Africa
 Latitude: -33.963 DD, Longitude: 22.4617 DD

Products

Pump: SQF 1.2-3, 1 x 96834838
 Solar module: 3 x Desrv 265

Sizing results - summary

Water production, Peak flow and Price

Total water production per year: 3400 m³
 Avg. water production per day: 9.3 m³/day
 Average water production per watt per day: 11.73 l/Wp/day

Typical performance at solar radiation 800 W/m²

Flow: 1.2 m³/h
 Total head: 100.0 m

Solar module configuration:

Number of solar modules in series: 3, in parallel: 1
 Solar array rated power: 0.795 kW
 Solar array rated volts: 92.31 V
 Sun tracking: No (fixed)
 Tilt angle: 33 deg.

Cables and pipes:

Pump cable length: 10 m
 Pump cable size: 1.5 mm²
 Total cable loss: 2.0 %

Pipe diameter: 32 mm
 Friction loss: 0.0 m



System performance - monthly average

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Water production [m ³ /day]	10.1	9.9	9.5	8.8	8.3	8.1	8.4	9	9.6	9.9	10.1	10.2
Energy production [kWh/day]	5.3	5.2	5.0	4.6	4.3	4.1	4.3	4.8	5.1	5.2	5.3	5.4
Radiation horizontal [kWh/m ² day]	8.7	7.8	6.5	4.9	3.9	3.4	3.7	4.7	6.2	7.4	8.4	9.0
Radiation tilt [kWh/m ² day]	7.8	7.7	7.2	6.5	6.0	5.7	6.1	6.7	7.4	7.6	7.7	7.8
Avg. Temp. [°C]	22.1	22.2	20.1	17.0	13.2	10.1	10.0	11.4	14.3	16.6	18.7	21.0

Solar data location: Latitude: -33 DD, Longitude: 23 DD

AC power (backup) - water production


Recommended minimum output: 1.5 kW
 AC 115 V: Produces: 1.31 m³/h
 AC 230 V: Produces: 1.33 m³/h

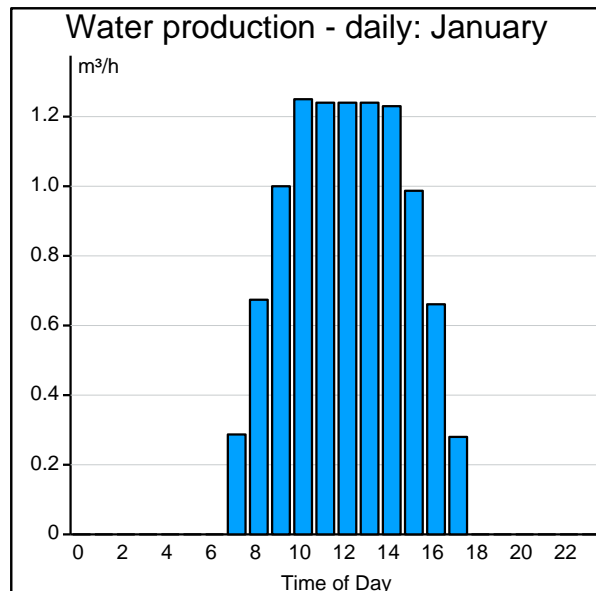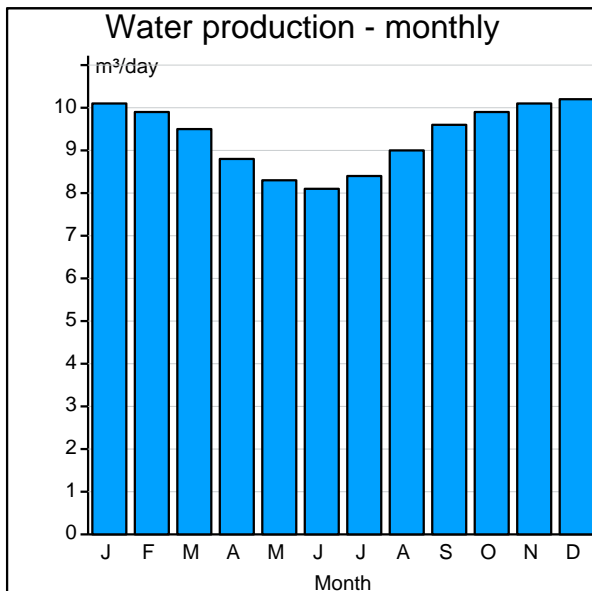

Project: Grundfos Solar Combo 4 (100m 10 000L per day)
Reference Number:

Client:
Client Number:
Contact:

Installation and Input

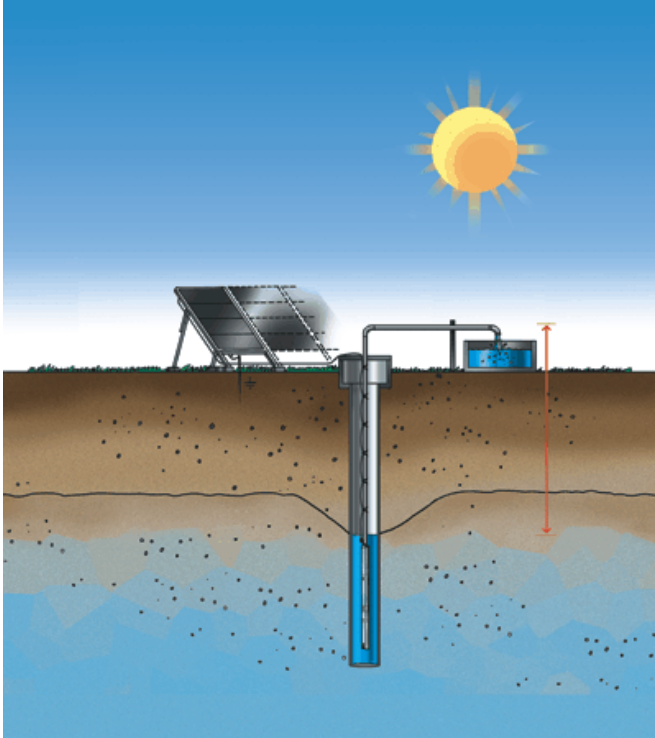

Sizing Results

Water production, Peak flow and Price

Total water production per year: 3400 m³
 Avg. water production per day: 9.3 m³/day
 Average water production per watt per day: 11.73 l/Wp/day

Solar module configuration:

Number of solar modules in series: 3, in parallel: 1
 Solar array rated power: 0.795 kW
 Solar array rated volts: 92.31 V
 Sun tracking: No (fixed)
 Tilt angle: 33 deg.

Typical performance at solar radiation 800 W/m²

Flow: 1.2 m³/h
 Total head: 100.0 m


Cables and pipes:

Pump cable length: 10 m
 Pump cable size: 1.5 mm²
 Total cable loss: 2.0 %

Pipe diameter: 32 mm
 Friction loss: 0.0 m

Location: George, Western Cape, South Africa
 Latitude: -33.963 DD, Longitude: 22.4617 DD

Pump Curve

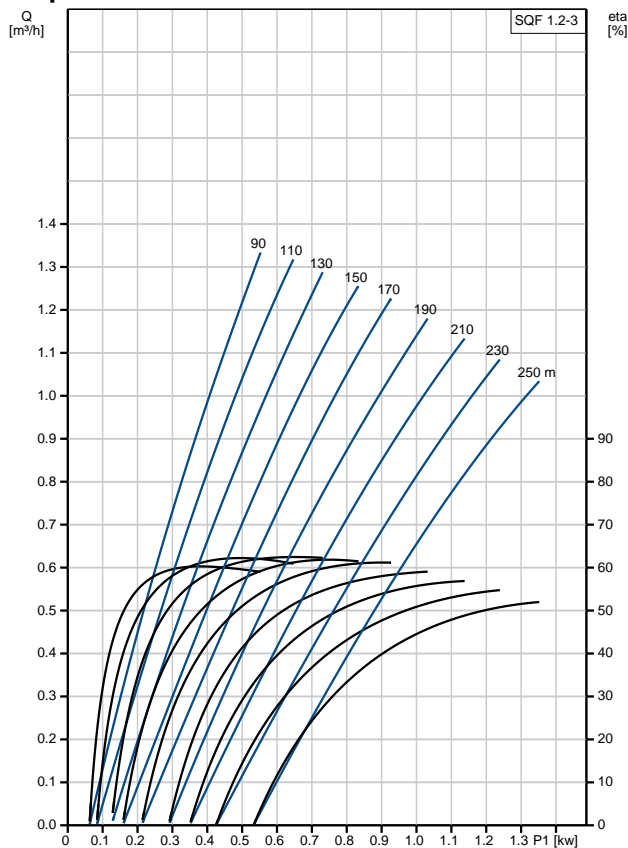

Dimensional Drawing

